




Zipper Specifications of PE13PR2

Description	
<i>Material:</i>	Low Density Polyethylene(LDPE)
<i>Opening and closing Forces:</i>	20 N/m av. $\pm 10\%$ mm and 55 N/m av. $\pm 10\%$ mm.
<i>Features:</i>	Can be made by adding different compounds to desired strength and softness. Soft Seal material with special sealant Suitable for food contact applications.
<i>Application:</i>	As per need big to small pouches.

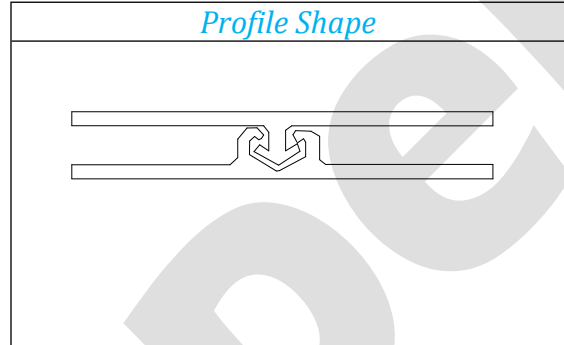

Profile Dimensions	
<i>Total width (mm)</i>	<i>Weight per meter (gm)</i>
13.0 mm ± 0.2 mm	5.5 ± 0.1

Indication on zipper
Indication sticker for opening/consumer side.

Reel with Zipper	
<i>Length (Nominal Meter)</i>	<i>Gross weight (kg)</i>
3000	19.700

Reel Dimensions	
<i>Flange diameter(mm)</i>	285
<i>Shaft hole diam.(mm)</i>	50
<i>External width(mm)</i>	455

Reel Specifications	
<i>Material</i>	ABS
<i>Transported</i>	Vertically

Packing Specifications	
<i>Pallet size (mm)</i>	<i>Length \times width \times Height</i>
	1040 \times 1100 \times 2220

Standard delivery
24 Reels/Pallet (72000 meters)

Recommended storage condition
Store indoors with original packaging at 10-40°C, dry and at a relative humidity below 70%
Protect against strong light (sun, electric lighting) and strong heat (radiation, electric heaters)

properties
Zipper material(s): Soft Seal material with special sealant Suitable for food contact applications. Sealing temperature range: 93-137 °C

Disclaimer
This information is accurate to the best knowledge of c k zipper. The suitability of this material for a particular application must be determined by the end user. C k zipper does not claims for consequential lost. We reserve right to change specification without prior notice.

Email: info@ckzipper.com
Website: www.ckzipper.com