




Zipper Specifications of PE 8LL

<i>Description</i>	
<i>Material:</i>	Low Density Polyethylene(LDPE)
<i>Opening and closing Forces:</i>	20 N/m av. $\pm 10\%$ mm and 55 N/m av. $\pm 10\%$ mm.
<i>Features:</i>	Can be made by adding different compounds to desired strength and softness. Soft Seal material with special sealant Suitable for food contact applications.
<i>Application:</i>	As per need big to small pouches.

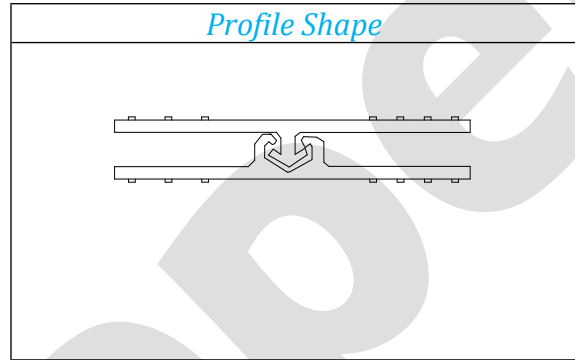

<i>Profile Dimensions</i>	
<i>Total width (mm)</i>	<i>Weight per meter (gm)</i>
8.0 mm ± 0.2 mm	4 ± 0.1

<i>Indication on zipper</i>
Indication sticker for opening/consumer side.

<i>Reel with Zipper</i>	
<i>Length (Nominal Meter)</i>	<i>Gross weight (kg)</i>
5000	23.200

<i>Reel Dimensions</i>	
<i>Flange diameter(mm)</i>	285
<i>Shaft hole diam.(mm)</i>	50
<i>External width(mm)</i>	455

<i>Reel Specifications</i>	
<i>Material</i>	ABS
<i>Transported</i>	Vertically

<i>Packing Specifications</i>	
<i>Pallet size (mm)</i>	<i>Length x width x Height</i>
	1040 x 1100x 2220

<i>Standard delivery</i>
24 Reels/Pallet (120000 meters)

<i>Recommended storage condition</i>
Store indoors with original packaging at 10-40°C,dry and at a relative humidity below 70%
Protect against strong light (sun, electric lighting) and strong heat (radiation, electric heaters)

<i>properties</i>
Zipper material(s): Soft Seal material with special sealant Suitable for food contact applications.
Sealing temperature range: 93-137 °C

<i>Disclaimer</i>
This information is accurate to the best knowledge of c k zipper. The suitability of this material for a particular application must be determined by the end user. C k zipper does not claims for consequential lost. . We reserve right to change specification without prior notice.

Email: info@ckzipper.com
Website: www.ckzipper.com