


## Zipper Specifications of Dual lock Zipper

Description	
<b>Material:</b>	Low Density Polyethylene(LDPE)
<b>Opening and closing Forces:</b>	20 N/m av. $\pm 10\%$ mm and 55 N/m av. $\pm 10\%$ mm.
<b>Features:</b>	Dual lock zipper offers easy grip and superior opening and closing features for consistent performance. Consumer - friendly double lock design. Consistency in consumer interaction (easy open /easy close)
<b>Application:</b>	Vacuum packaging, Microwave packaging and so on

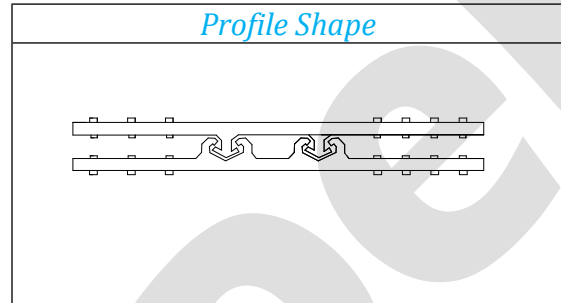

Profile Dimensions	
Total width (mm)	Weight per meter (gm)
20 mm $\pm 0.2$ mm	9 $\pm 0.1$

Indication on zipper
Indication sticker for opening /consumer side.

Reel with Zipper	
Length (Nominal Meters)	Gross weight (kg)
2000	21.200

Reel Dimensions	
Flange diameter(mm)	285
Shaft hole diam.(mm)	50
External width(mm)	455

Reel Specifications	
Material	ABS
Transported	Vertically

Packing Specifications	
Pallet size (mm)	Length $\times$ width $\times$ Height 1040 $\times$ 1100 $\times$ 2220

Standard delivery
24 Reels/Pallet (48000 meters)

Recommended storage condition
Store indoors with original packaging at 10-40°C,dry and at a relative humidity below 70%
Protect against strong light (sun, electric lighting) and strong heat ( radiation, electric heaters)

properties
Zipper material(s): Soft Seal material with special sealant Suitable for food contact applications. Sealing temperature range: 93-137 °C

Disclaimer
This information is accurate to the best knowledge of c k zipper. The suitability of this material for a particular application must be determined by the end user. C k zipper does not claim for consequential lost. We reserve right to change specification without prior notice.